



RETAINING WALL SYSTEM



**BAINES
MASONRY**
Quality First

Lockblocks[®] Wall System

Australian Owned, Designed and Manufactured


PRODUCT INFORMATION

Lockblocks® Wall System

As a mortar-less interlocking block system, walls are quicker and easier to erect - perfect for a DIY project. Use Lockblocks® as a stronger and lighter alternative to standard masonry. Their sleek finish complements various designs - enquire about Lockblocks® today!




Retaining Walls



Full Block

398mm x 198mm x 190mm
Approx. 12 kg each
90 per pallet
Code LB 20-91

Front Fences



Full Corner/End Block

290mm x 198mm x 190mm
Approx. 12 kg each
90 per pallet
Code LB 20-92


Privacy Walls



Half Corner/Half Block

190mm x 198mm x 190mm
Approx. 7 kg each
180 per pallet
Code LB 20-93

Dividing Walls



195mm Cap

390mm x 195mm x 40mm
Approx. 5 kg each
288 per pallet
Code 50-31

ADHESIVE BEAD PLACEMENT

Soudal Purocol Express polyurethane adhesive is specially formulated for construction and landscape projects needing a fast set-up time. This adhesive has proven to be a premier choice, providing a fast, but permanent bond in 60-90 minutes. It can be used on almost any material, even damp and non-porous surfaces.

Directions


1. Make sure the surface is clear of any materials that may prevent adequate adhesion like frost, water, and other contaminants.
2. Cut the nozzle tip on marks provided for a 6-10mm bead. Carefully cut open tube above thread and screw nozzle on.
3. Using a caulking gun, apply the adhesive to one of the surfaces.
4. Press surfaces together with a slight twisting motion.

User Tips

1. Not for continuous submersion or use below the waterline.
2. A lightly moistened surface (water spray) can accelerate the hardening process and increase the filling character.
3. Curing times vary depending on humidity, porosity, temperature and materials bonded together.
4. Not intended for direct contact with flame or fire brick.

Cleanup

Uncured adhesive may be cleaned with mineral spirits or Soudal Gun & Foam Cleaner. Cured adhesive can only be removed mechanically. Dispose of contents and container to appropriate hazardous or special waste disposal points.

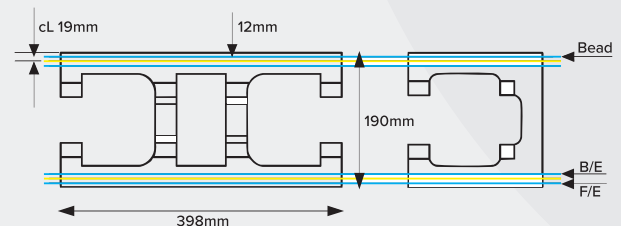

Colours displayed in this brochure are to be used as a guide only. Colours are as close as printing process will allow. Displays in store may vary to actual colour due to batch variations. Obtain samples from Baines Masonry for current batch colour. Care should be taken to order sufficient products to complete job at one time to avoid batch variations. Surplus blocks are not returnable. No claims after seven (7) days or once products have been incorporated in construction.

Refer to Evaluation and Installation guide or website for specification. Check with your local Council to ensure all local building requirements are complied with.

Lockblocks® is a registered trade mark of Baines Masonry and is used under licence. Please see our full terms and conditions on our website.



**BAINES
MASONRY**
Quality First

900 Wilton Road (PO Box 89)
Appin NSW 2560

T. 02 4631 1383

info@bainesmasonry.com.au

www.bainesmasonry.com.au