



solid solutions to better hardscapes

Sealers

Premium Stone Seal™

ENHANCE


Natural Stone Color

RESTORE

Natural Stone Beauty

PROTECT

Your Investment

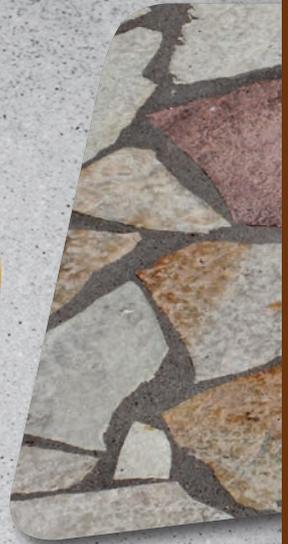

BETTER products • BETTER service • BETTER support • BETTER results



Choose the Best Formula for Your Natural Stone Project

SRW PRODUCTS Premium Stone Seal™ APPLICATION CHART	Surface Material					SRW Sealer Benefits				
	Granite/Quartz	Limestone	Marble/Travertine	Bluestone/Sandstone	Manufactured/Cultured Stone	Penetrating/Natural Look	Film-Forming/Enhancing	Reduce Salt/Frost Damage	UV Resistance	Commercial Grade
S-PS PENETRATING	X	X	X	X	X	X		X		
S-PSX PENETRATING X-TREME	X	X	X	X	X	X		X		X
S-HGX HIGH GLOSS X-TREME	X	X	X		X		X	X	X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

S-PS Penetrating



Benefits

- ▶ Invisible/natural-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Seals and protects

Applications

- ▶ Granite/Quartz
- ▶ Limestone
- ▶ Marble/Travertine
- ▶ Bluestone/Sandstone

Not for use on structures under hydrostatic pressure



Instructions



bitly.com/S-PSsealer

S-PSX Penetrating X-treme



Benefits

- ▶ New 'Stain Preventer' technology
- ▶ Invisible/natural-look finish
- ▶ Recommended for high traffic walkways & commercial applications
- ▶ Protects stones from staining by water, oil, food and more



Applications

- ▶ Concrete/Clay Pavers
- ▶ Concrete Permeable Pavers

Not for use on structures under hydrostatic pressure



Instructions



bitly.com/S-PSXsealer

S-HGX High Gloss X-treme



Benefits

- ▶ High-gloss, wet-look finish
- ▶ Recommended for commercial and residential applications
- ▶ Highly durable, long-lasting protection in extreme conditions
- ▶ Enhances and protects

Applications

- ▶ Limestone
- ▶ Granite/Quartz
- ▶ Marble/Travertine
- ▶ Cultured Stone

Not for use on structures under hydrostatic pressure or permeable pavers



Instructions



bitly.com/S-HGXsealer

Premium Stone Clean SW Stone Wash



Benefits

- ▶ Prepares natural stone surfaces prior to sealing
- ▶ Removes ground-in dirt, light grease and oil

Applications

- ▶ Granite/Quartz
- ▶ Limestone
- ▶ Marble/Travertine
- ▶ Bluestone/Sandstone

Not for use on sealed surfaces. Use after spot treatments.



Instructions



bitly.com/SWcleaner

DG Dual Guard



Benefits

- ▶ 2 levels of protection in 1 application
- ▶ Long-lasting penetrating protection
- ▶ Color enhancing, wet-look finish
- ▶ Acrylic/siloxane blend
- ▶ Commercial strength

Applications

- ▶ Concrete Pavers
- ▶ Most Natural Stone
- ▶ Wetcast
- ▶ Cultured Stone

Not for use on bluestone/sandstone or structures under hydrostatic pressure



Instructions



bitly.com/DGsealer

FAQ

Get answers to our most commonly asked questions. Have a question not answered here? Call us on 1300 779 776 or e-mail info@bainesmasonry.com.au

SRW
PRODUCTS

solid solutions to better hardscapes

How long should I wait to seal after installing polymeric sand?

Wait for sand to fully cure before sealing. Be sure the moisture has been released. We recommend waiting at least 28 days after polymeric sand installation.

What if there are stains on my natural stone?

Clean your stones with one or more of these SRW Specialty Clean™ products **before** you seal. Then, wait at least 24 hours before sealing to ensure surface and joints are completely dry.

OC Organic Stain Cleaner



Benefits

- ▶ Removes tar, gum, rubber and paint
- ▶ Easy to use
- ▶ Rinses clean with water

TR Tar Gum & Rubber Remover



Benefits

- ▶ Breaks down organic stains from leaves, pine needles, acorns, fruit, wine, etc.
- ▶ Rinses clean with water

MC Mold, Moss & Mildew



Benefits

- ▶ Breaks down mold, moss, mildew, lichen and algae
- ▶ Non-acidic, no-bleach formula
- ▶ No scrubbing or rinsing!

CD Cleaner & Degreaser



Benefits

- ▶ Removes grease, oil and dirt
- ▶ Rinses clean with water
- ▶ Heavy-duty concentrated formula

RE Rust Eliminator



Benefits

- ▶ Removes rust and hard water stains
- ▶ Rinses clean with water
- ▶ Fast-acting concentrated formula

What do I use to clean up after sealing?



SRW XY Xylene is a fast-acting solvent that thins and dissolves acrylic sealer to aid in tool clean up and overspray.

What if I need to remove sealer?



SRW has a solution for every need. SS Sealer Stripper is a biodegradable, yet industrial-strength formula that removes sealing and curing compounds.

Is it necessary to use an SRW Slit Foam Roller?

Yes. A slit foam roller is the best choice for backrolling because it helps evenly distribute the sealer and prevent it from pooling.



Is it necessary to use a sprayer to apply?

While you can successfully apply SRW sealers using only a Slit Foam Roller, it is highly recommended that a sprayer is used to apply an even coat. A second person would then follow the sprayer with a slit foam roller to make sure the sealer is evenly distributed and prevent it from pooling.



Can I seal if rain is in the forecast?

SRW recommends a clear forecast for at least 24 hours before and after sealer application.